


REV.

APPR. BY CUSTOMER



CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07003AA							
VI-422				DRIVING METHOD	STATIC Vop=4.5V	UNSPECIFIED: ± 0.2mm								
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED: ± 0.5°								
				STORAGE TEMP.	-30°C TO +80°C									
				CONNECTION	PIN									1 OF 2

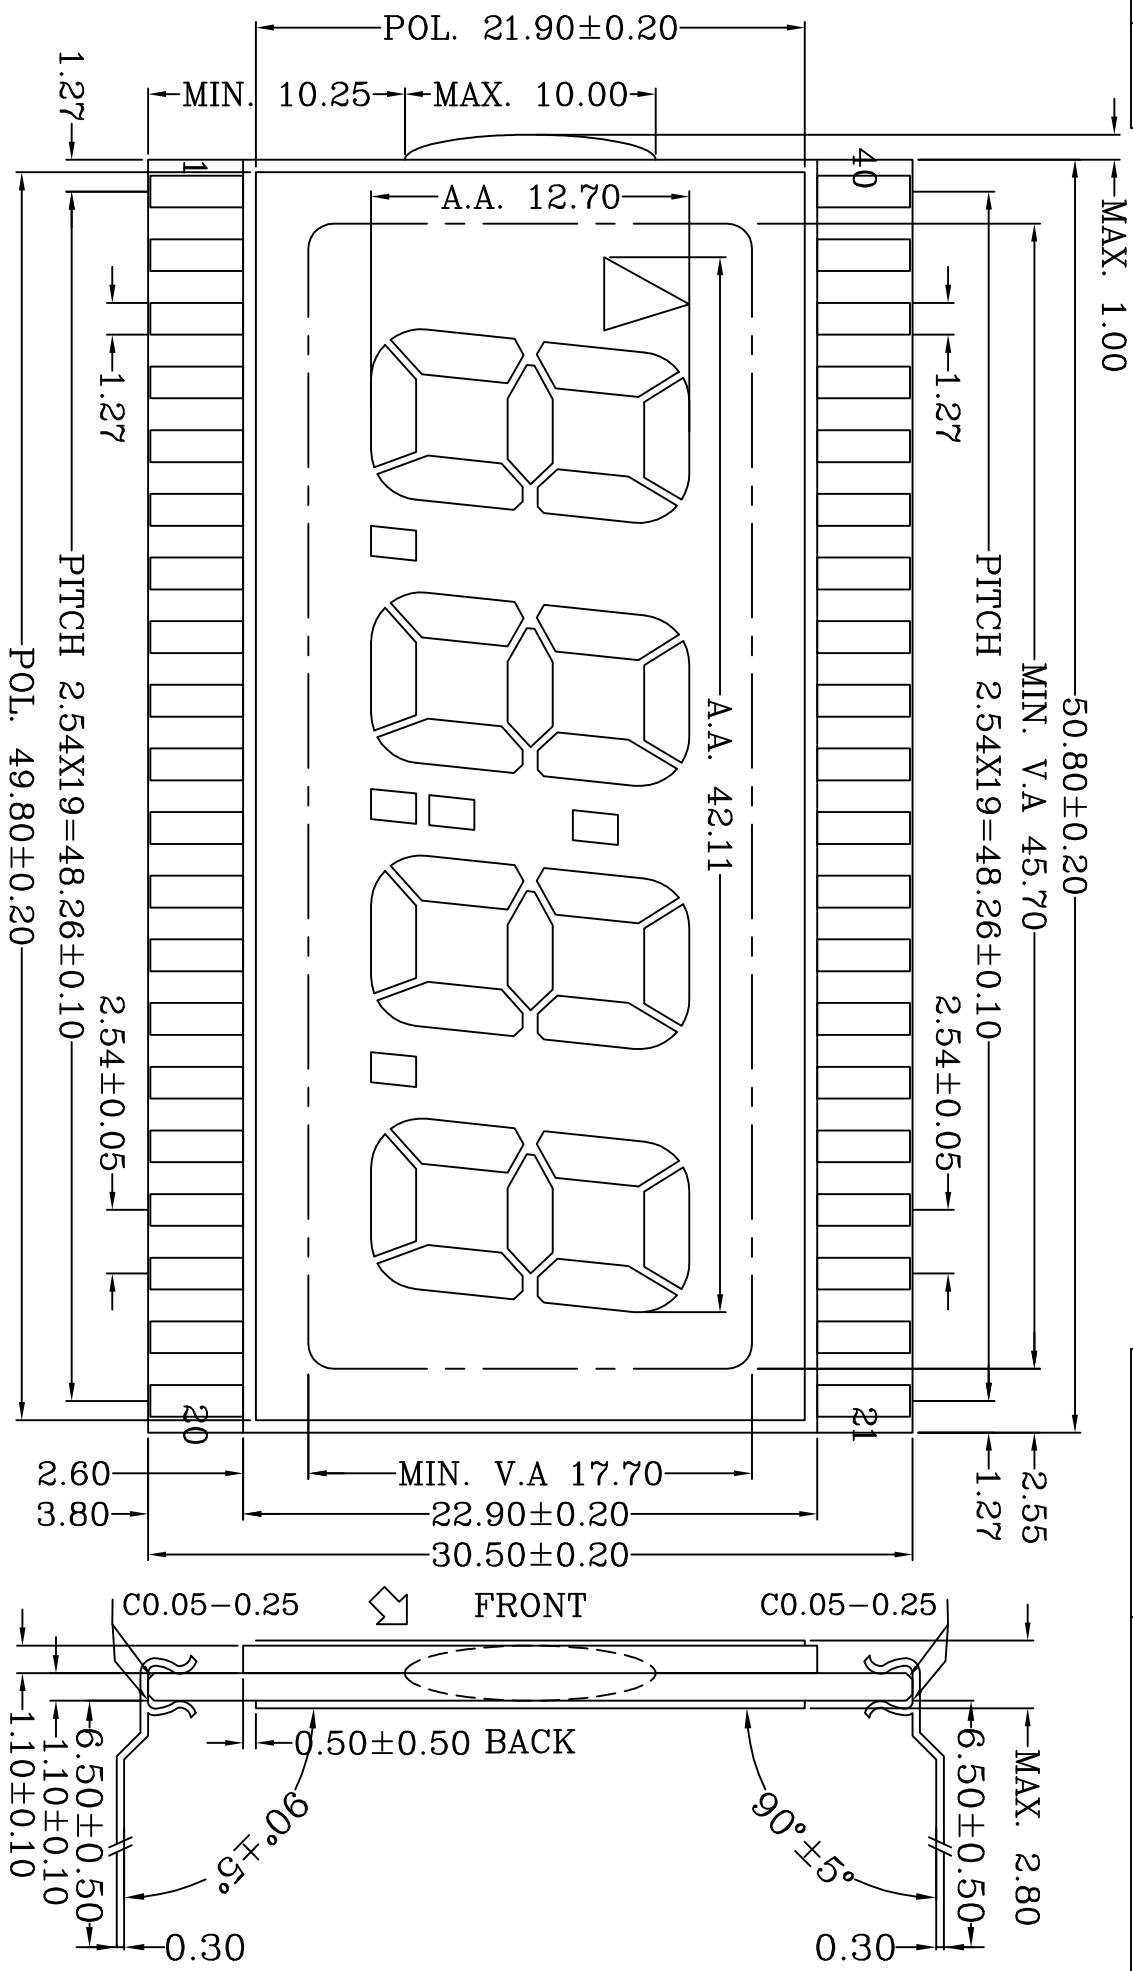

GLORY SOUND (ASIA) LTD

