


REV.

APPR. BY CUSTOMER




CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07003AA							
VI-422				DRIVING METHOD	STATIC Vop=4.5V	UNSPECIFIED: ± 0.2mm								
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED: ± 0.5°								
				STORAGE TEMP.	-30°C TO +80°C									
				CONNECTION	PIN									1 OF 2

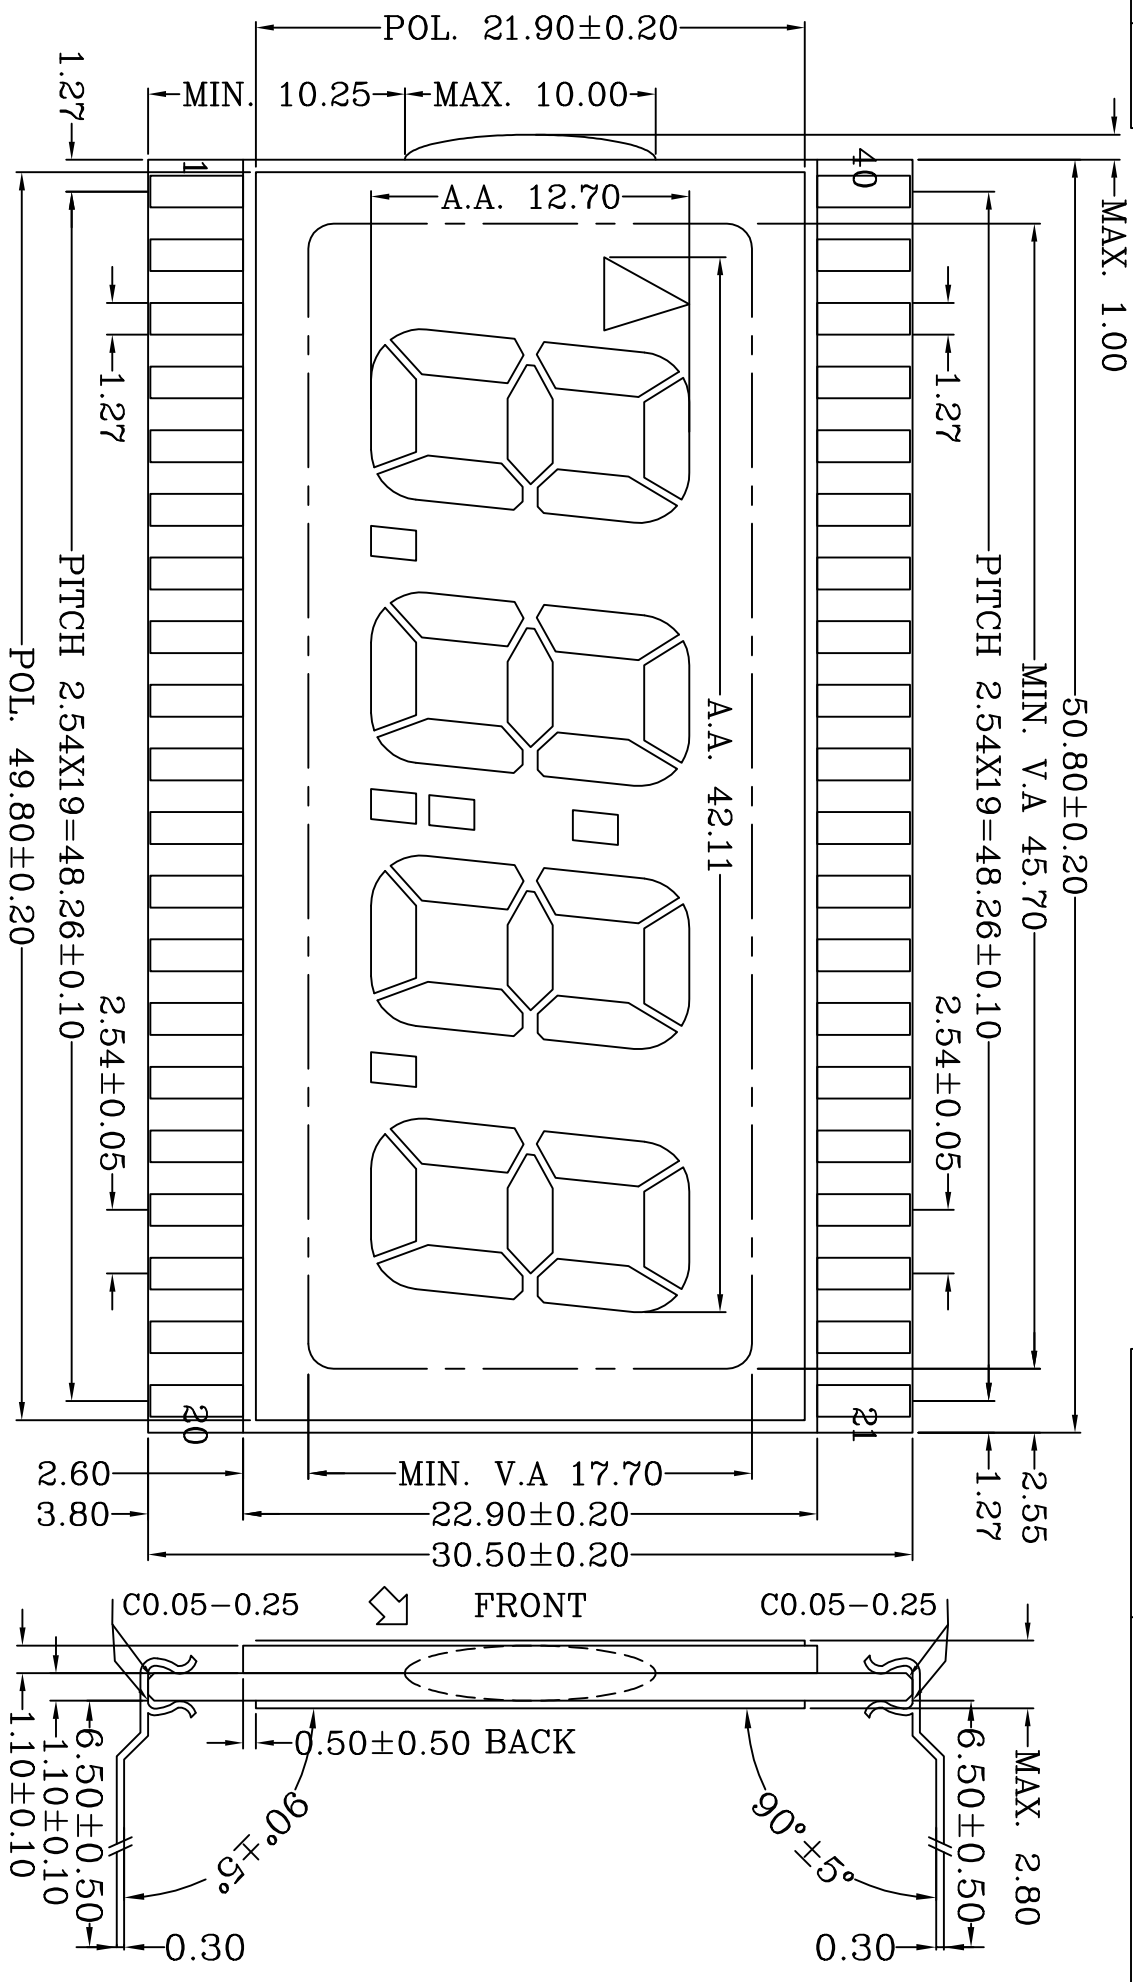

GLORY SOUND (ASIA) LTD

REV.

APPR. BY CUSTOMER

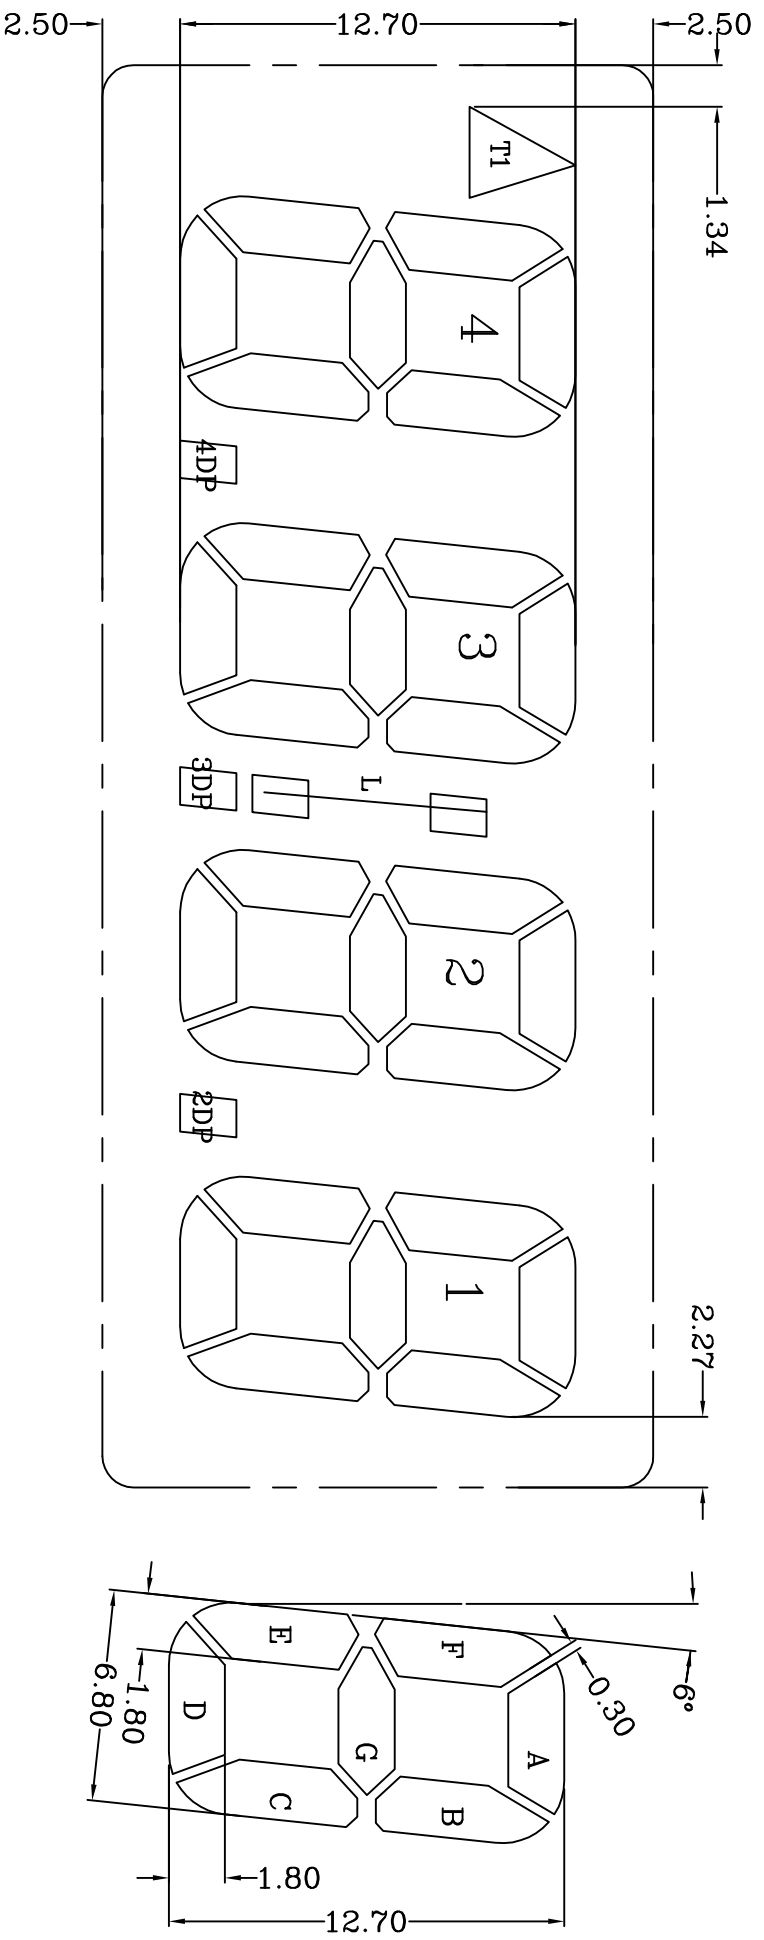

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	NC	NC	NC	4E	4D	4C	4DP	3E	3D	3C	3DP	2E	2D	2C	2DP	1E	1D	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	1A	1F	1G	2B	2A	2F	2G	L	3B	3A	3F	3G	NC	4B	4A	4F	4G	T1	NC	COM

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DWG.	DATE	CHK.	DATE	APPR.D.	DATE	PAGE
				VIEWING DIRECTION	6 O'CLOCK		GS-07003AA							
CUSTOMER P/N				DRIVING METHOD	STATIC Vop=4.5V									
VI-422				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED:								
QTN NO.				STORAGE TEMP.	-30°C TO +80°C	UNSPECIFIED:								
				CONNECTION	PIN	± 0.2mm								
						± 0.5°								2 OF 2



GLORY SOUND (ASIA) LTD