REV.		APPR. BY CUSTOMER	

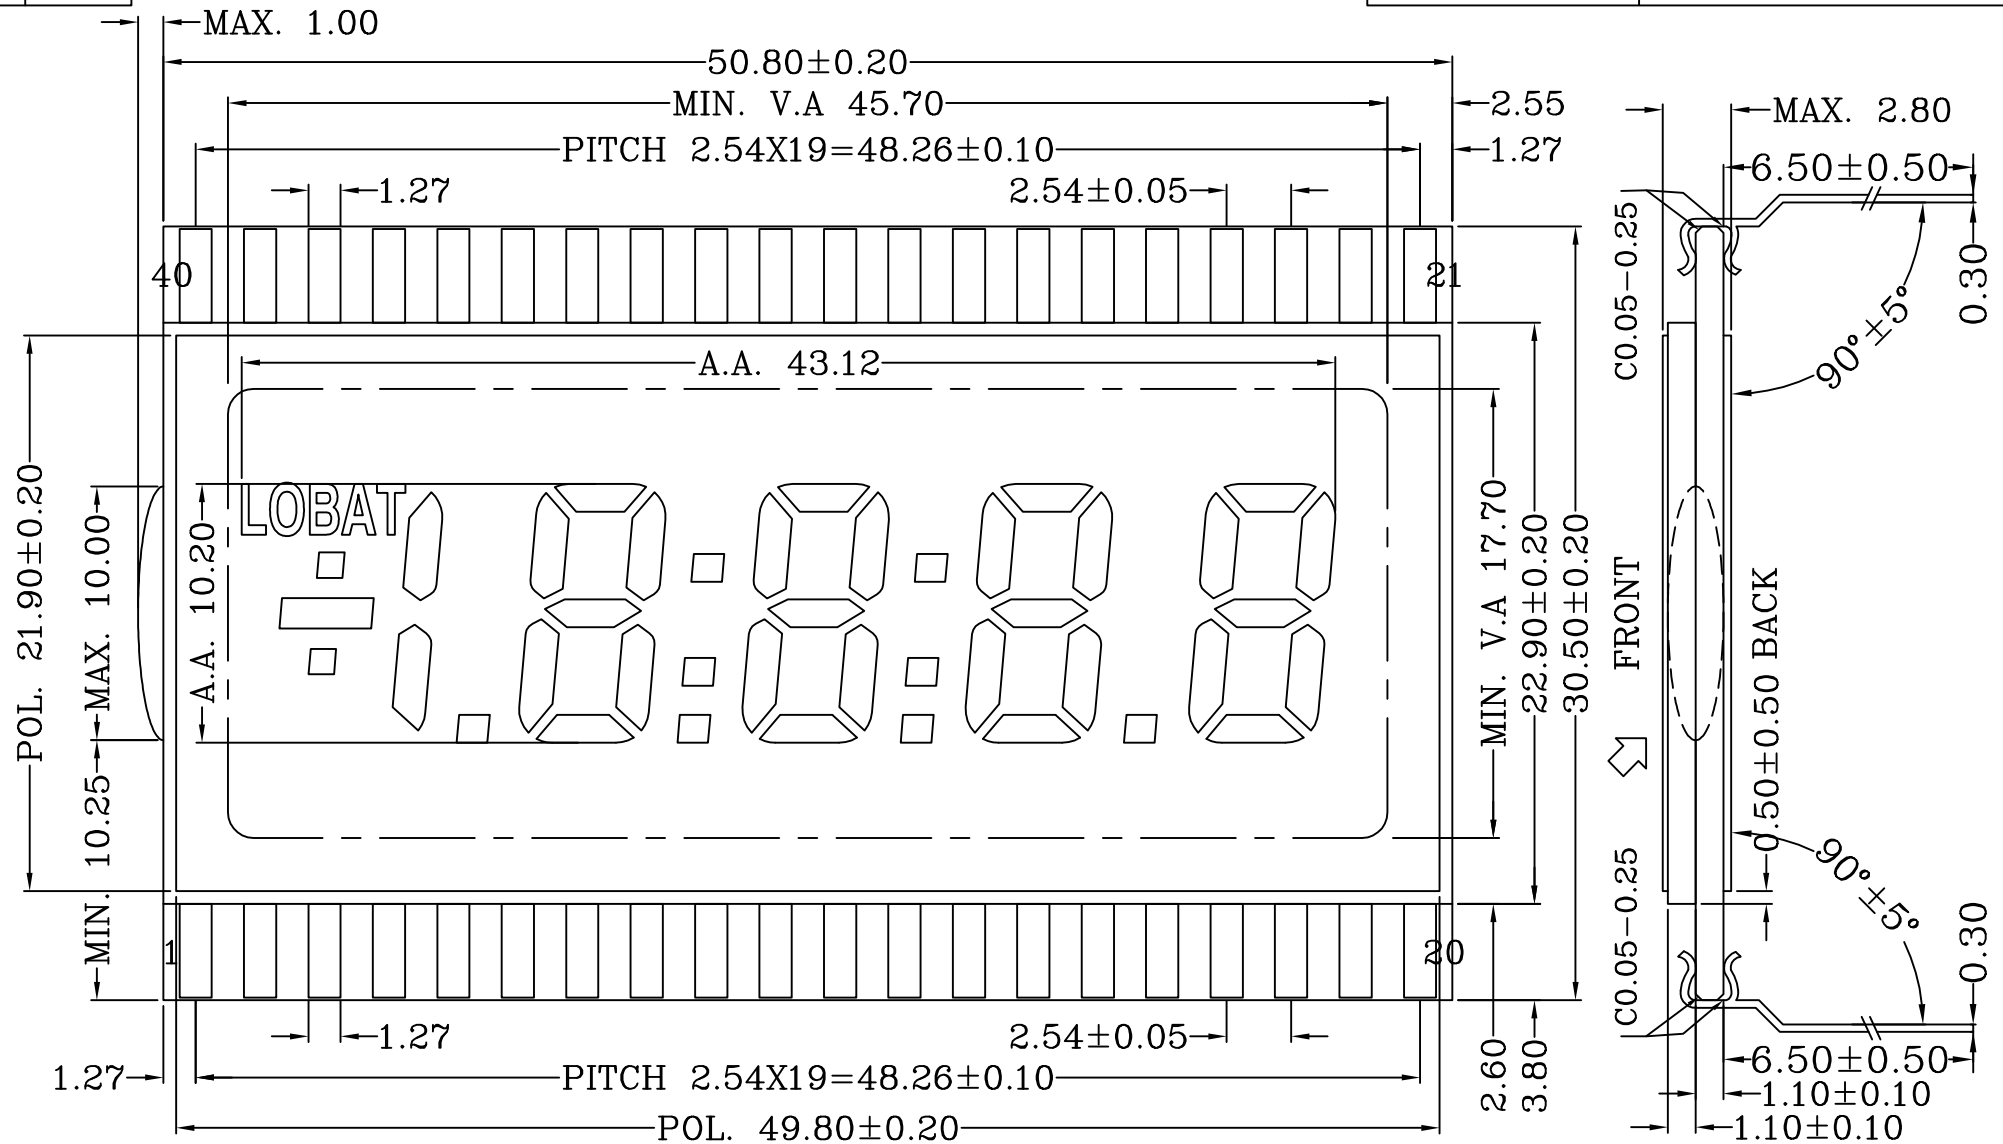

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN,POSITIVE/REFLECTIVE
				VIEWING DIRECTION	6 O'CLOCK
CUSTOMER P/N				DRIVING METHOD	STATIC Vop=4.5V
VI-509				OPERATING TEMP.	-20°C TO +70°C
QTN NO.				STORAGE TEMP.	-30°C TO +80°C
				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

GS-07016AA

DWG.	DATE	CHK.
XLY	07/07/09	

GLORY SOUND (ASIA) LTD

DATE	APPR'D.	DATE	PAGE
			1 OF 2

REV.		APPR. BY CUSTOMER	

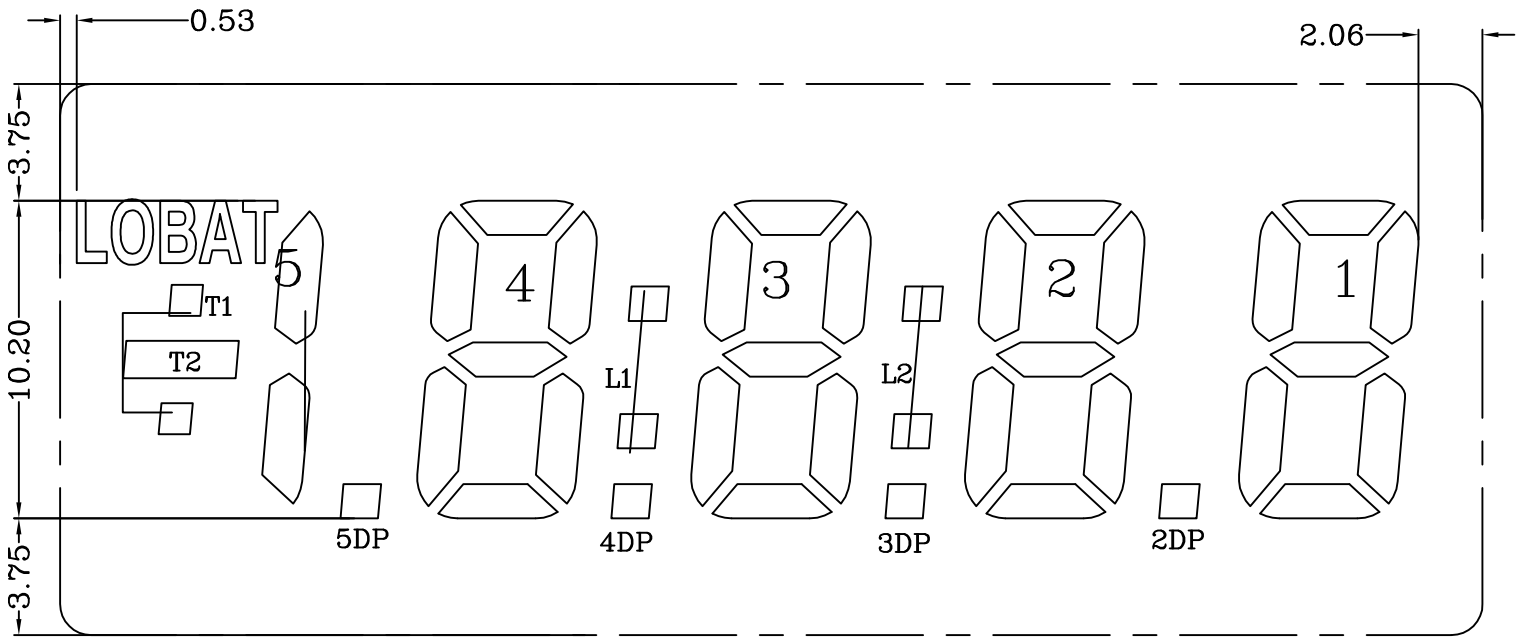

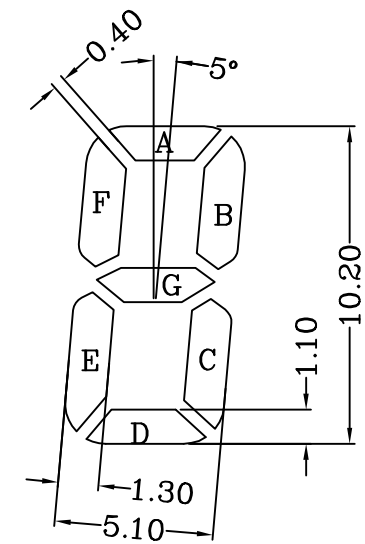

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	T2	5BC	5DP	4E	4D	4C	4DP	3E	3D	3C	3DP	2E	2D	2C	2DP	1E	1D	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	1A	1F	1G	2B	2A	2F	2G	L2	3B	3A	3F	3G	L1	4B	4A	4F	4G	LO BAT	T1	COM

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN,POSITIVE/REFLECTIVE
				VIEWING DIRECTION	6 O'CLOCK
CUSTOMER P/N				DRIVING METHOD	STATIC Vop=4.5V
VI-509				OPERATING TEMP.	-20°C TO +70°C
QTN NO.				STORAGE TEMP.	-30°C TO +80°C
				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

GS-07016AA

GLORY SOUND (ASIA) LTD

DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
XLY	07/07/09					2 OF 2