


REV. _____

APPR. BY CUSTOMER



CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07017AA	XLY	07/07/09					1 OF 2
VI-602				DRIVING METHOD	STATIC TOP=4.5V		UNSPECIFIED:							
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	± 0.2mm								
				STORAGE TEMP.	-30°C TO +80°C	UNSPECIFIED:								
				CONNECTION	PIN	± 0.5°								

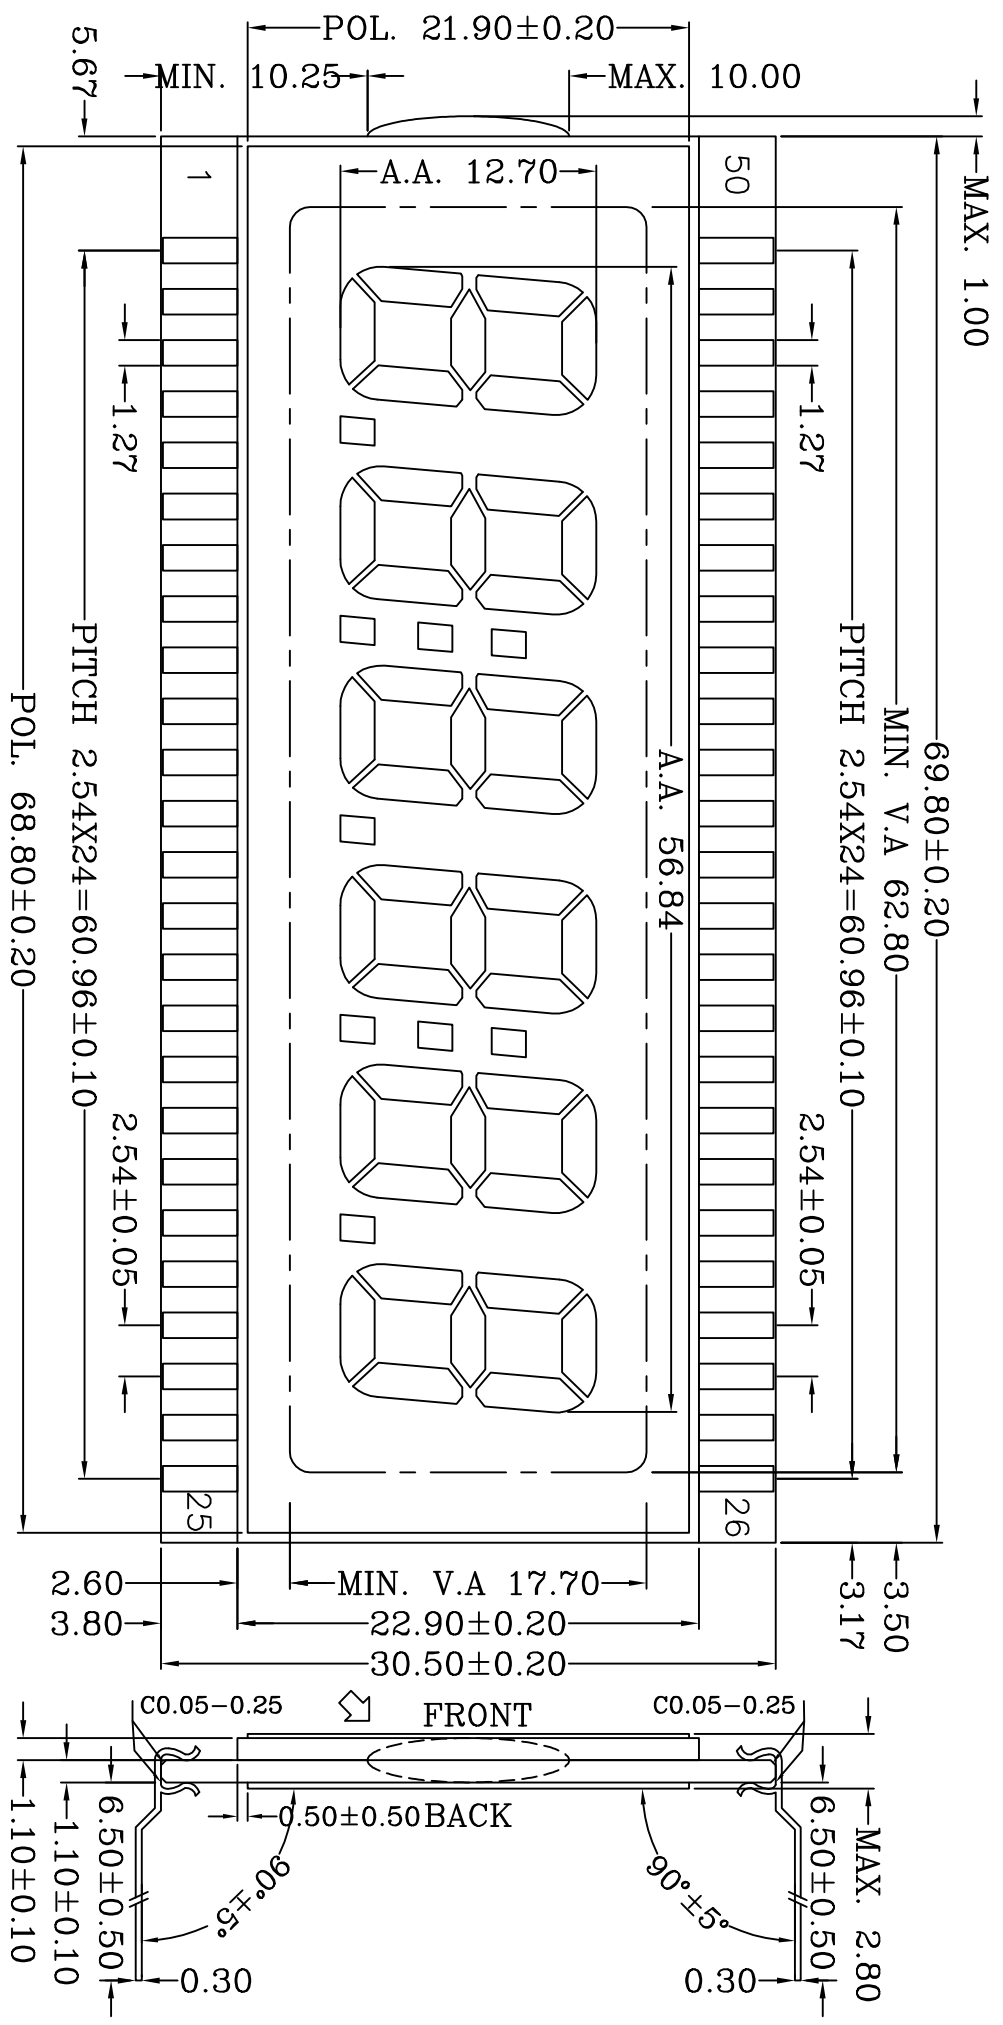

GLORY SOUND (ASIA) LTD

