


CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07020AA						
VI-319				DRIVING METHOD	STATIC Vop=4.5V								
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED: ± 0.2mm							
				STORAGE TEMP.	-30°C TO +80°C	UNSPECIFIED: ± 0.5°							
				CONNECTION	PIN								1 OF 2



GLORY SOUND (ASIA) LTD

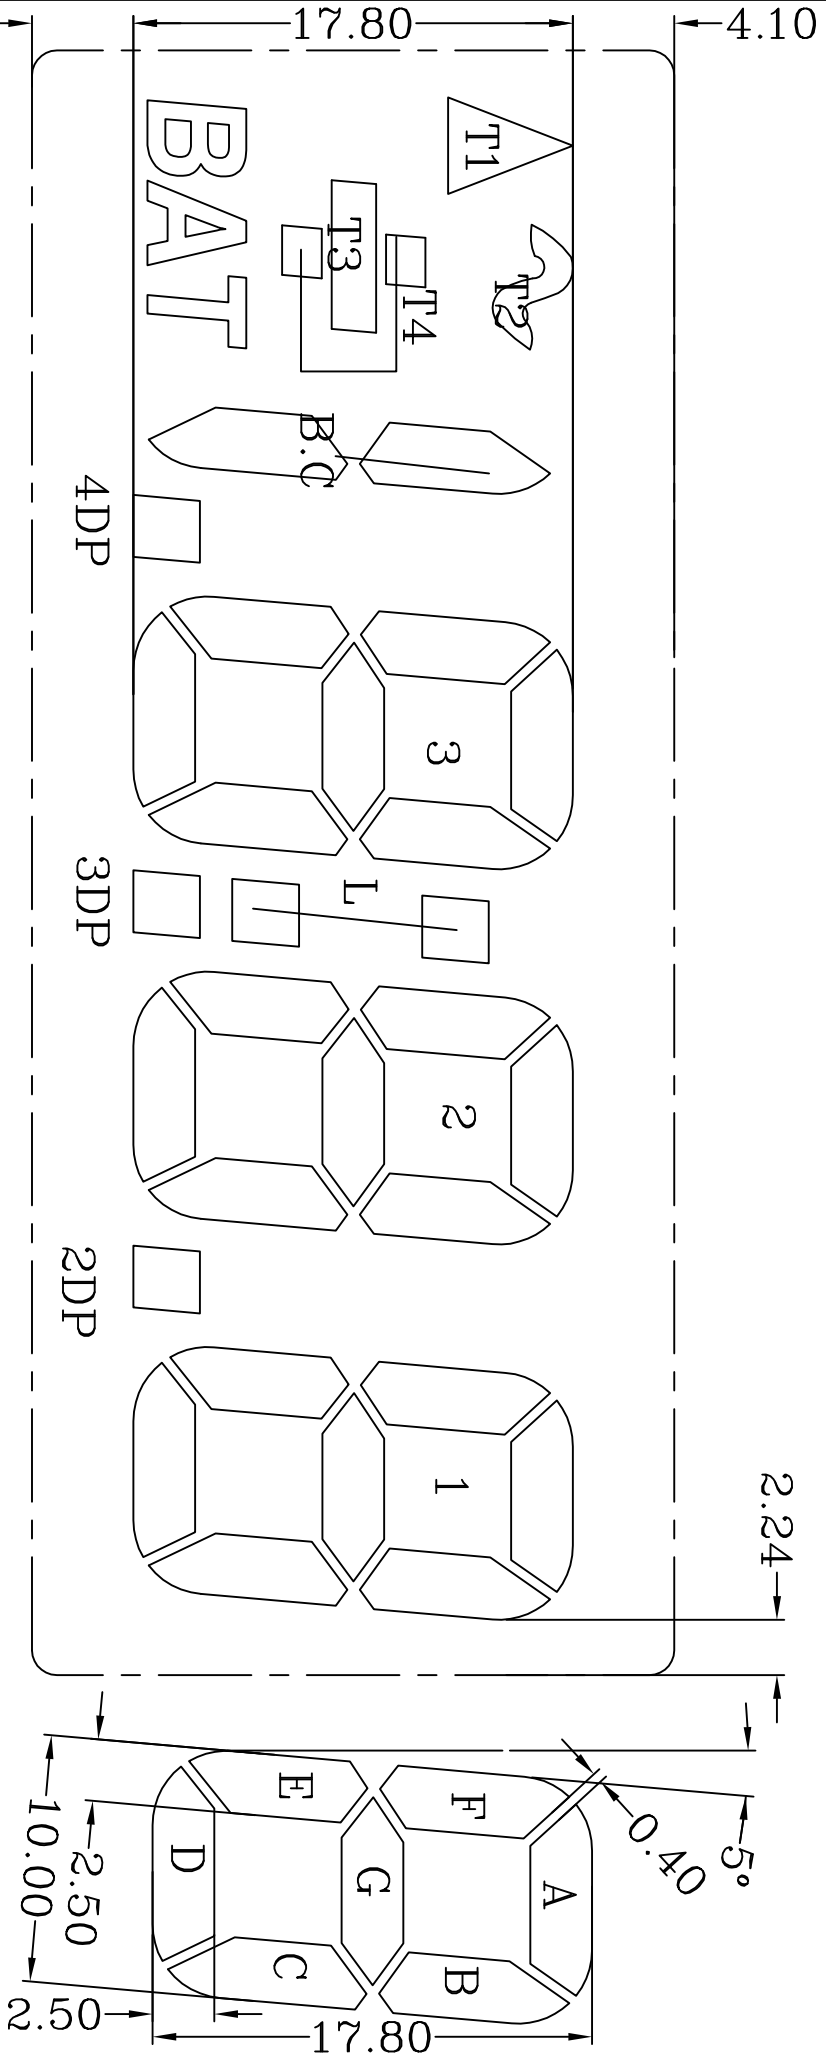

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	T3	B.C	NC	NC	NC	NC	4DP	3E	3D	3C	3DP	2E	2D	2C	2DP	1E	ID	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	1A	1F	1G	2B	2A	2F	2G	L	3B	3A	3F	3G	NC	NC	NC	NC	T2	T1	T4	BAT

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07020AA
VI-319				DRIVING METHOD	STATIC Vop=4.5V		GLORY SOUND (ASIA) LTD
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED:	DWG. DATE CHK. DATE APPR'D. DATE PAGE
				STORAGE TEMP.	-30°C TO +80°C	± 0.2mm	XLX 07/07/10
				CONNECTION	PIN	UNSPECIFIED:	
						± 0.5°	