


REV.

APPR. BY CUSTOMER



CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DATE	CHK.	DATE	APPR.D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK	± 0.2mm	GS-07021AA	07/07/10					1 OF 2
VI-415				DRIVING METHOD	STATIC Vop=4.5V	UNSPECIFIED:							
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED:							
				STORAGE TEMP.	-30°C TO +80°C	± 0.5°							
				CONNECTION	PIN								

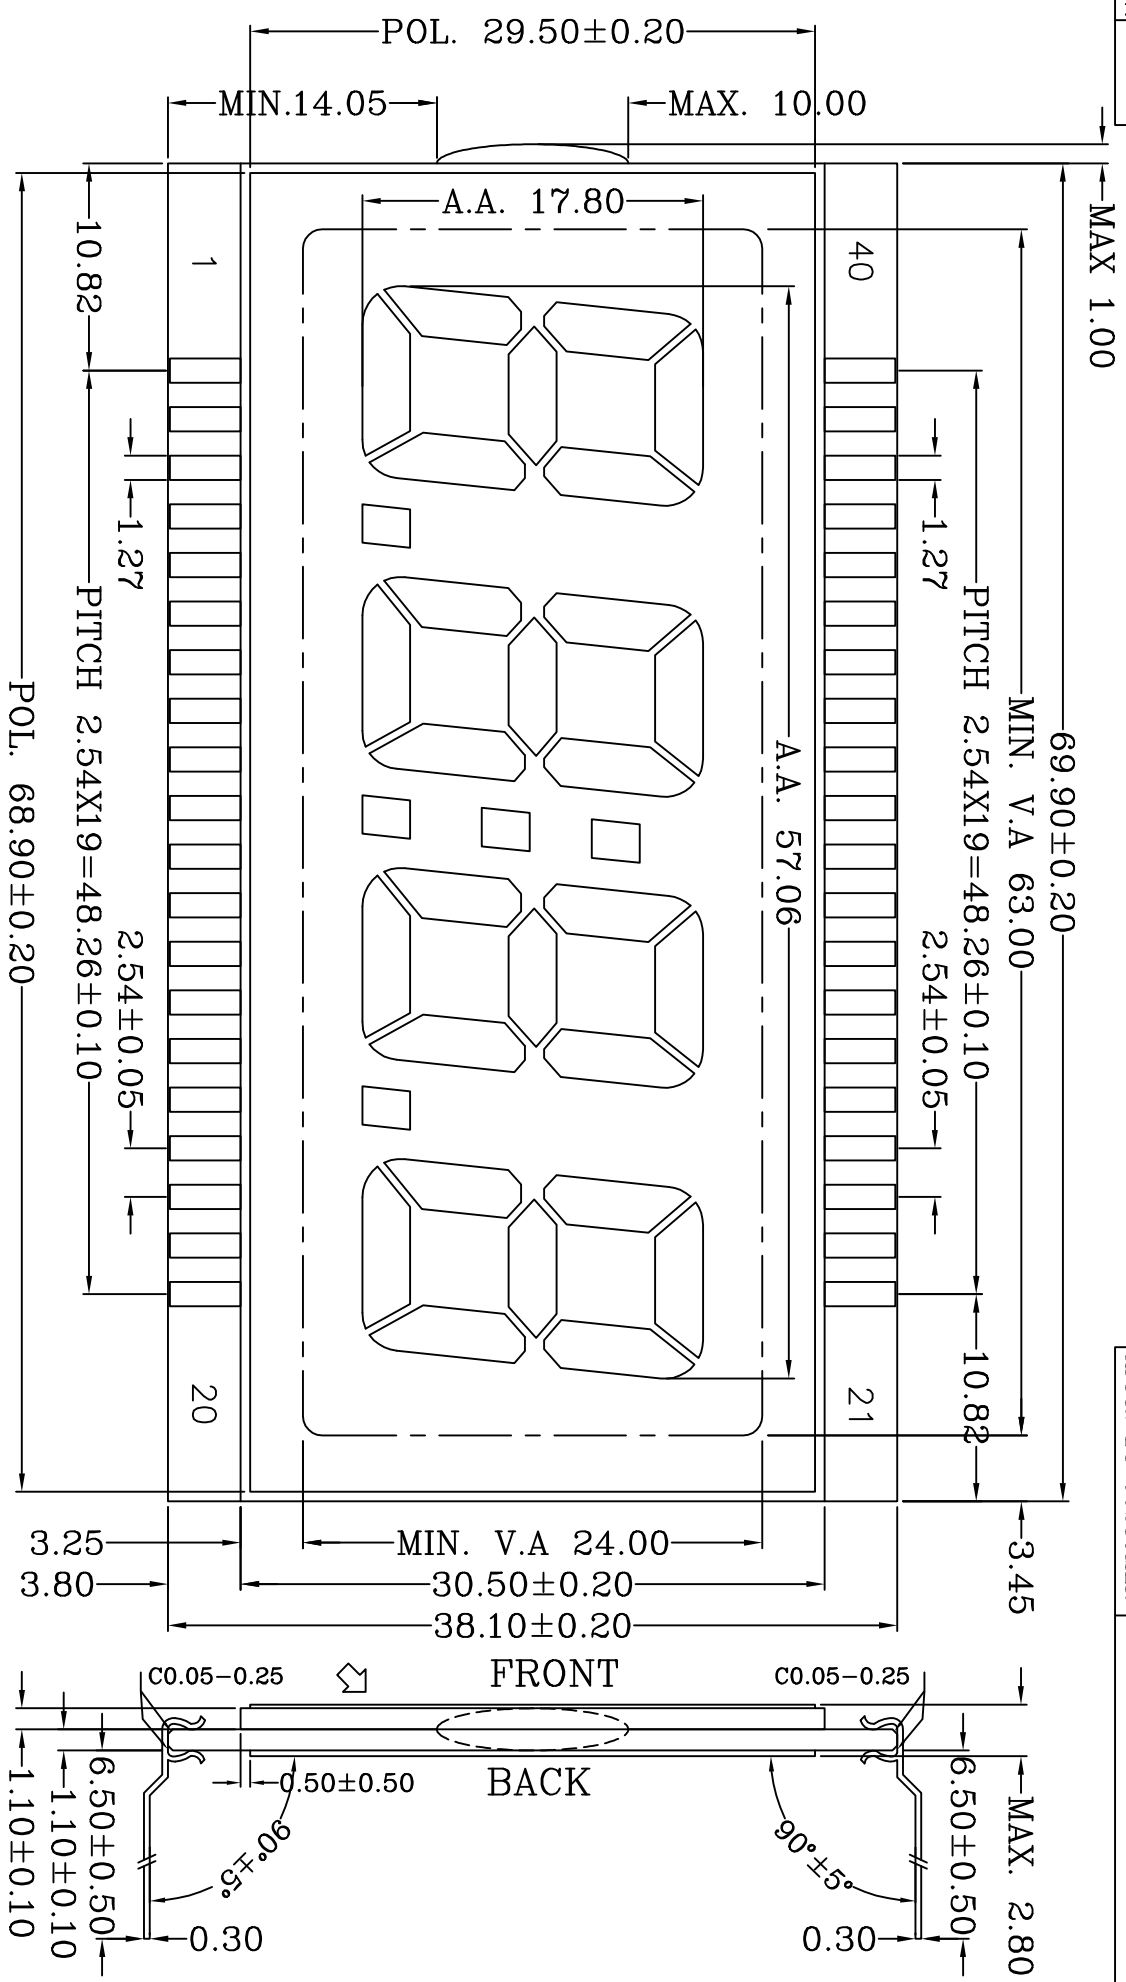

