



REV.

APPR. BY CUSTOMER

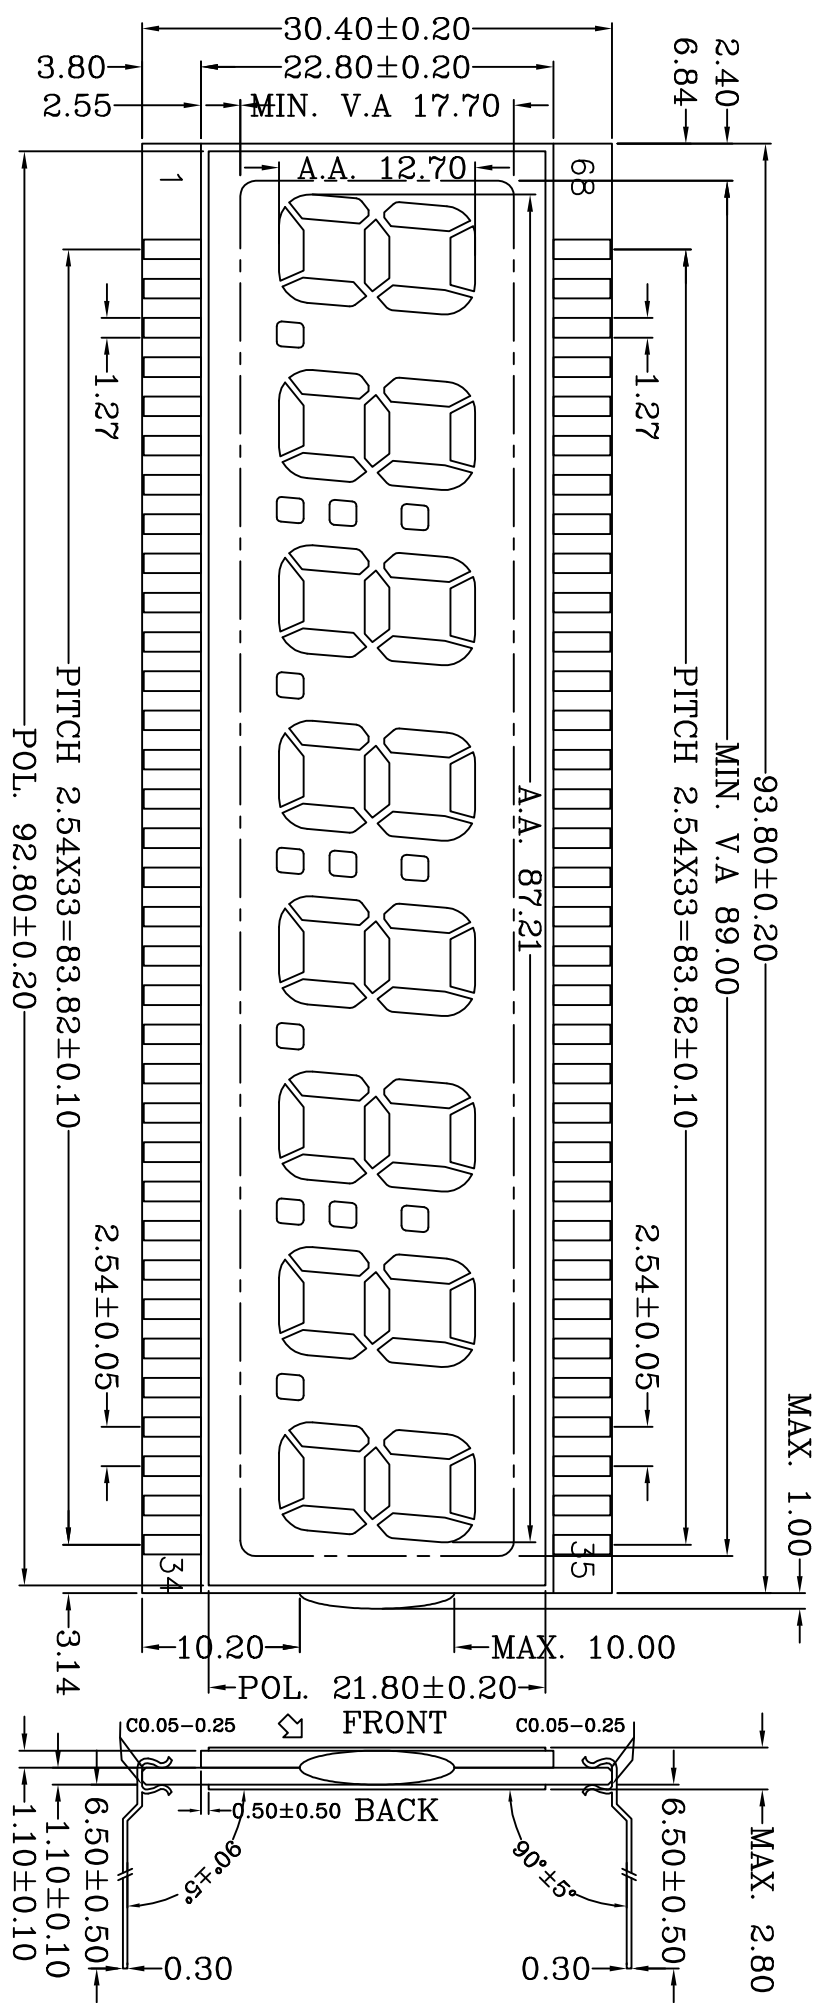


CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07025AA	DWG.					
VI-804				DRIVING METHOD	STATIC Vop=4.5V	UNSPECIFIED:		DATE					
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	± 0.2mm							
				STORAGE TEMP.	-30°C TO +80°C	UNSPECIFIED:							
				CONNECTION	PIN	± 0.5°		XLY		07/07/11			1 OF 2



REV.

APPR. BY CUSTOMER

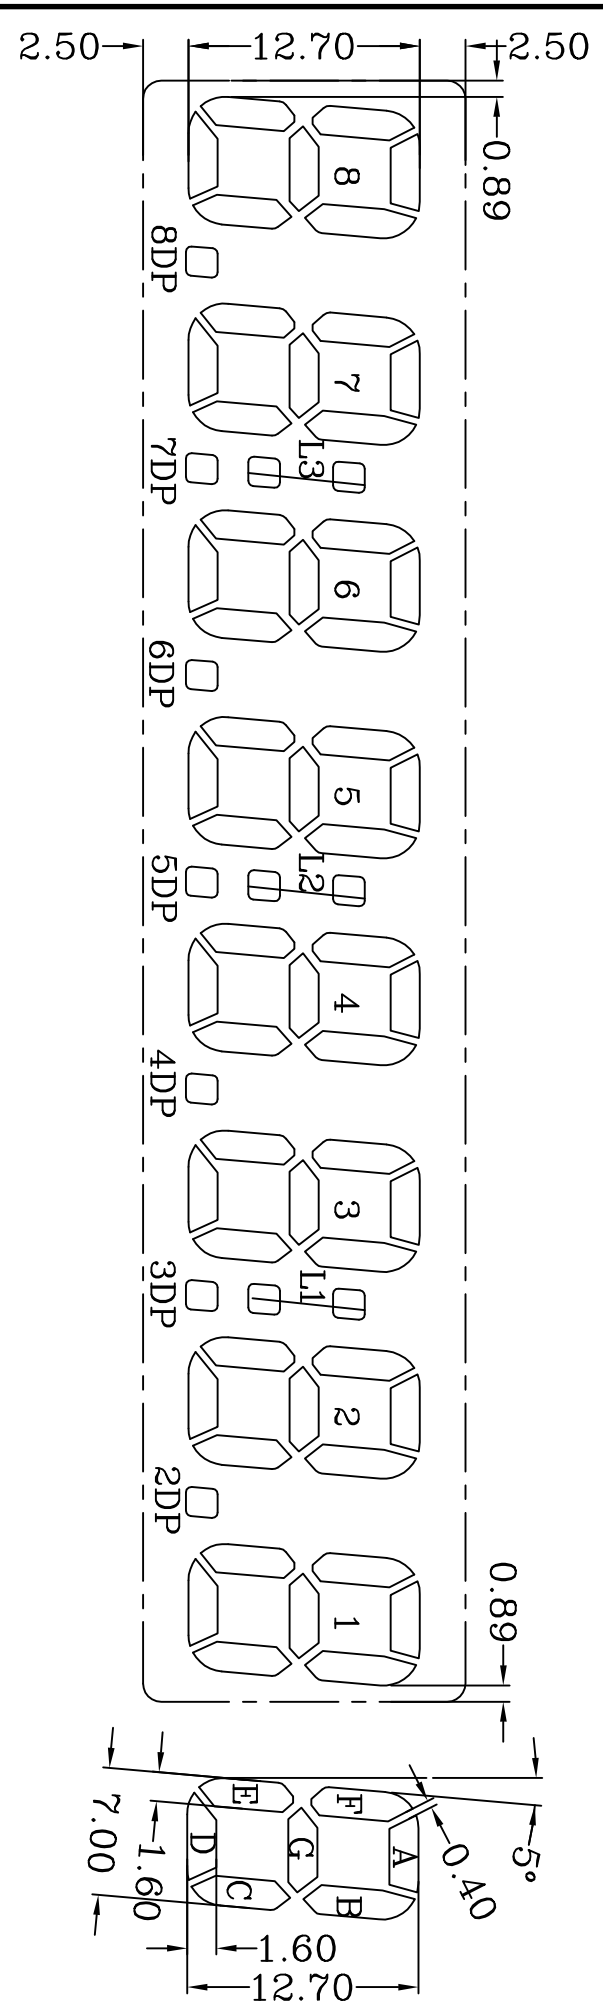

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
COM	COM	8E	8D	8C	8DP	7E	7D	7C	7DP	COM	6E	6D	6C	6DP	5E	5D	5C	5DP	4E	4D	4C	4DP	3E
PIN	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46
COM	3D	3C	3DP	2E	2D	2C	2DP	1E	1D	1C	1B	1A	1F	1G	2B	2A	2F	2G	L1	3B	3A	3F	3G
PIN	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	
COM	4B	4A	4F	4G	L2	5B	5A	5F	5G	6B	6A	6F	6G	L3	7B	7A	7F	7G	8B	8A	8F	8G	

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.
				VIEWING DIRECTION	6 O'CLOCK		GS-07025AA
CUSTOMER P/N				DRIVING METHOD	STATIC Vop=4.5V	UNSPECIFIED:	
VI-804				OPERATING TEMP.	-20°C TO +70°C	± 0.2mm	DWG: DATE
QTN NO.				STORAGE TEMP.	-30°C TO +80°C	UNSPECIFIED:	CHK: DATE
				CONNECTION	PIN	± 0.5°	APPR'D: DATE
							PAGE
							2 OF 2



GLORY SOUND (ASIA) LTD