REV.		APPR. BY CUSTOMER	

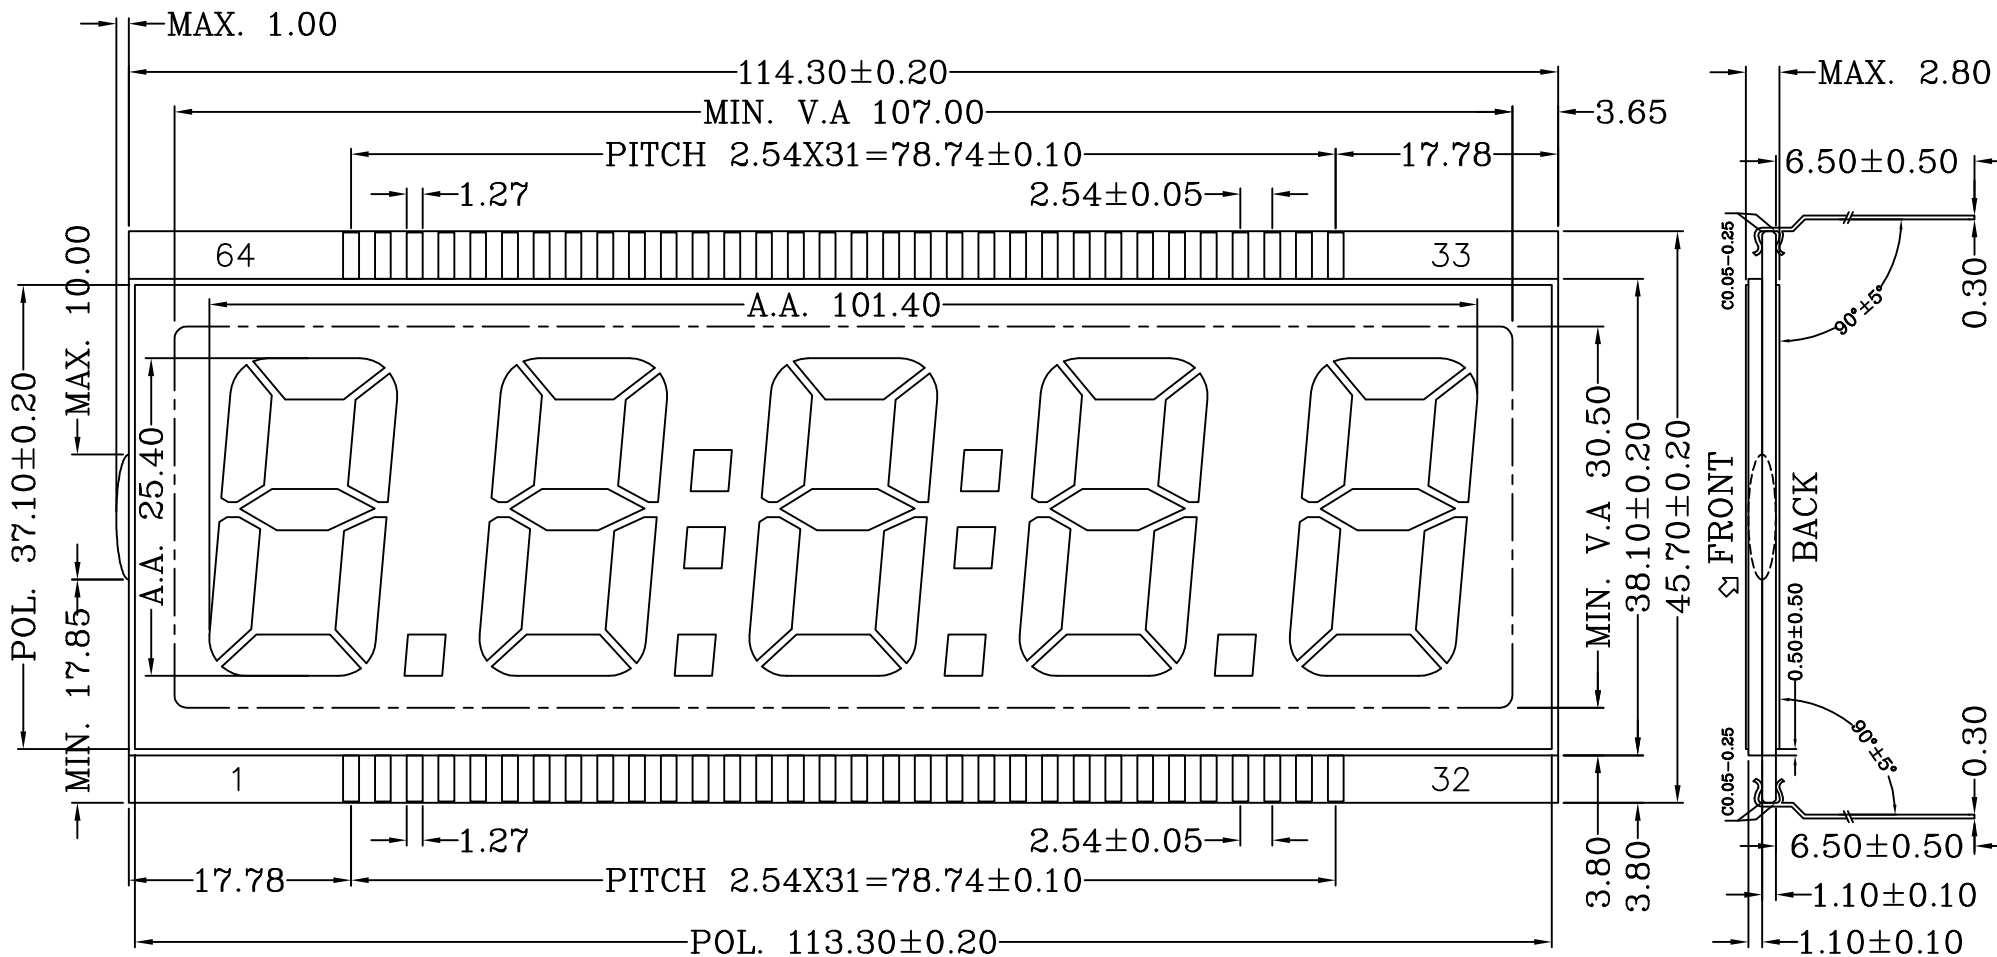

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN,POSITIVE/REFLECTIVE
				VIEWING DIRECTION	6 O'CLOCK
CUSTOMER P/N				DRIVING METHOD	STATIC Vop=4.5V
VI-507				OPERATING TEMP.	-20°C TO +70°C
QTN NO.				STORAGE TEMP.	-30°C TO +80°C
				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

GS-07028AA

DWG.	DATE	CHK.
XLY	07/07/11	

GLORY SOUND (ASIA) LTD

DATE	APPR'D.	DATE	PAGE
			1 OF 2

REV.		APPR. BY CUSTOMER	

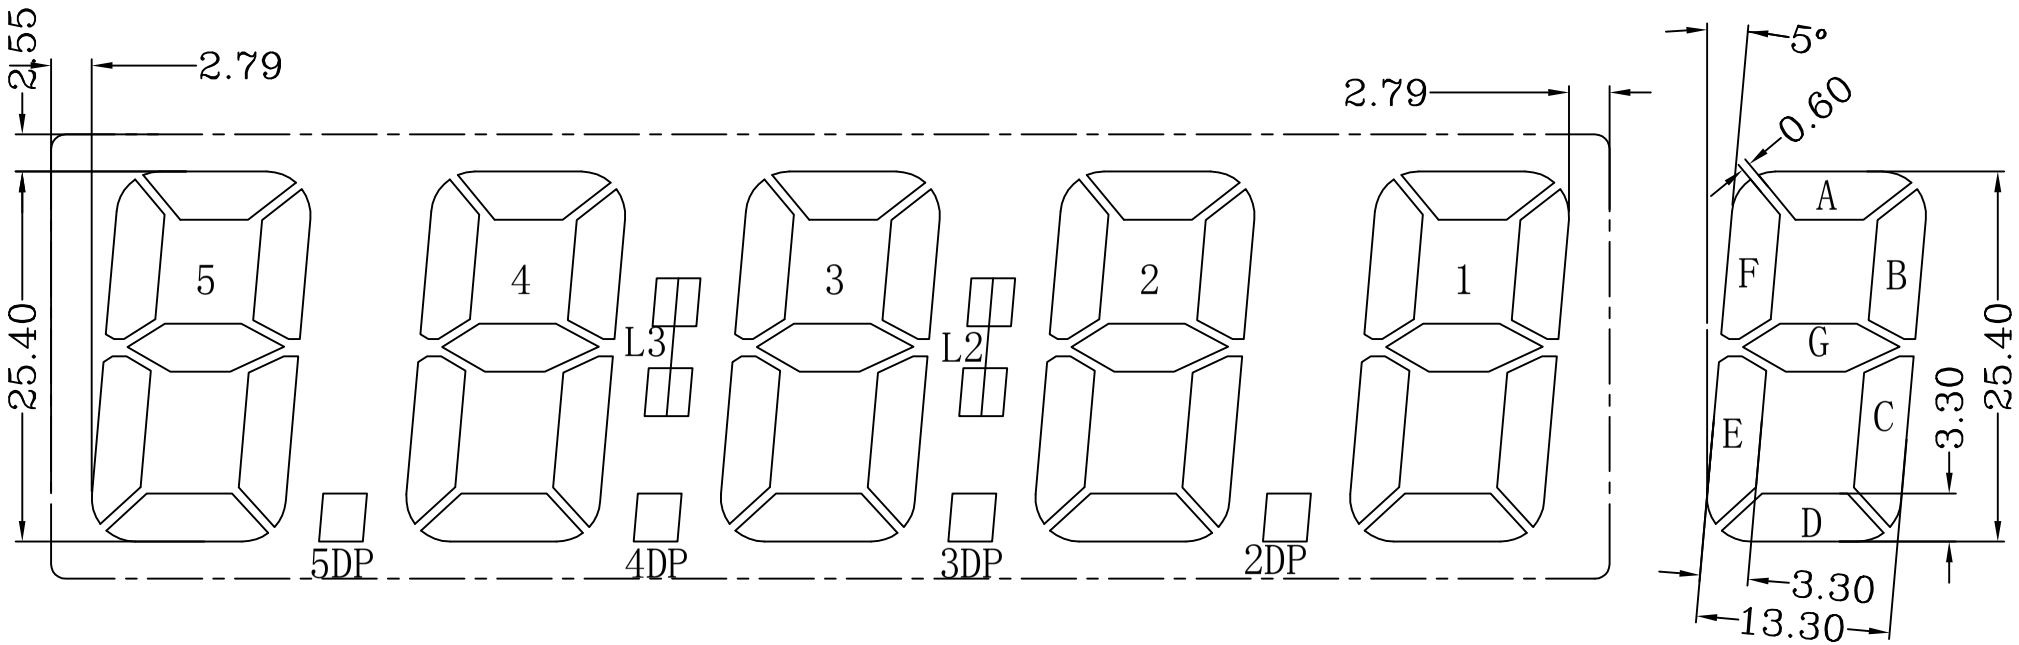

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
COM	COM	5E	5D	5C	5DP	4E	NC	NC	4D	4C	NC	4DP	NC	3E	NC	NC	NC	3D	3C	3DP	NC	NC
PIN	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
COM	2E	NC	2D	2C	NC	2DP	1E	1D	1C	1B	1A	1F	1G	NC	NC	2B	2A	NC	NC	2F	2G	L2
PIN	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64		
COM	3B	3A	NC	NC	NC	3F	3G	L3	NC	4B	4A	NC		4F	4G	5B	5A	5F	5G	COM		

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN,POSITIVE/REFLECTIVE
				VIEWING DIRECTION	6 O'CLOCK
CUSTOMER P/N				DRIVING METHOD	STATIC Vop=4.5V
VI-507				OPERATING TEMP.	-20°C TO +70°C
QTN NO.				STORAGE TEMP.	-30°C TO +80°C
				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

GS-07028AA

GLORY SOUND (ASIA) LTD

DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
XLY	07/07/11					2 OF 2